

The semi-smooth C-Type envelopes will display banners to great effect. The 16 gore envelope is constructed by sewing together 32 half-gores. Each half-gore consists of six nylon panels, including two quarter lenticular panels.

The narrow row of panels at the base of the balloon is made from fire resistant Nomex™.



References for the panels - from the Nomex™ upwards - are A, Bx, By (lenticular panel), Cx, Cy (lenticular panel), and D.

A parachute top is standard. This is constructed from 32 panels that radiate from a center patch.

For horizontally based patterns such as spirals or vertical stripes the number of colors used must divide evenly into 16, color sequences that do not divide evenly into 16 will result in an asymmetric color pattern.

There is no extra charge for changes of fabric color at any of the lines shown on the chart if the colors are from the standard Cameron range.

The standard Cameron Nomex™ colors are also listed below and should only be used in the Nomex™ base panel and Scoop.

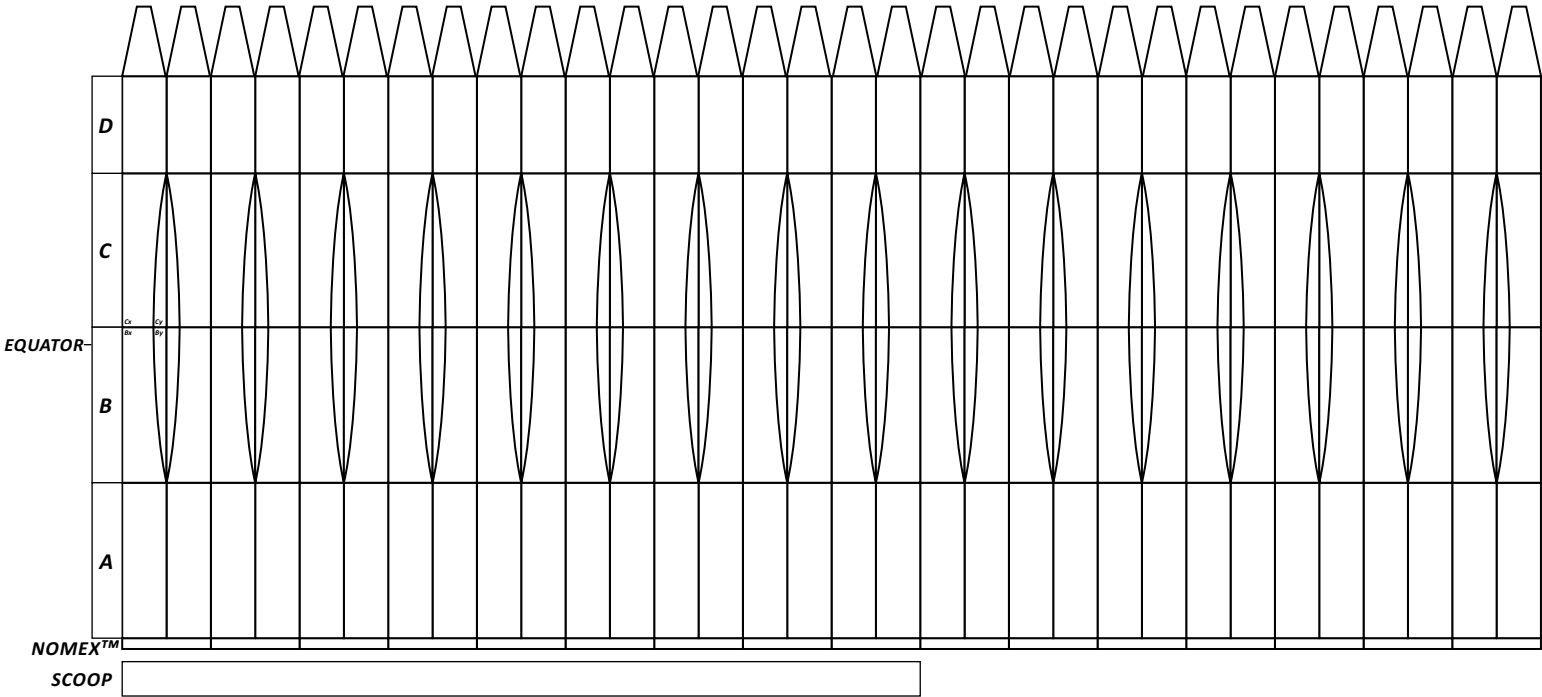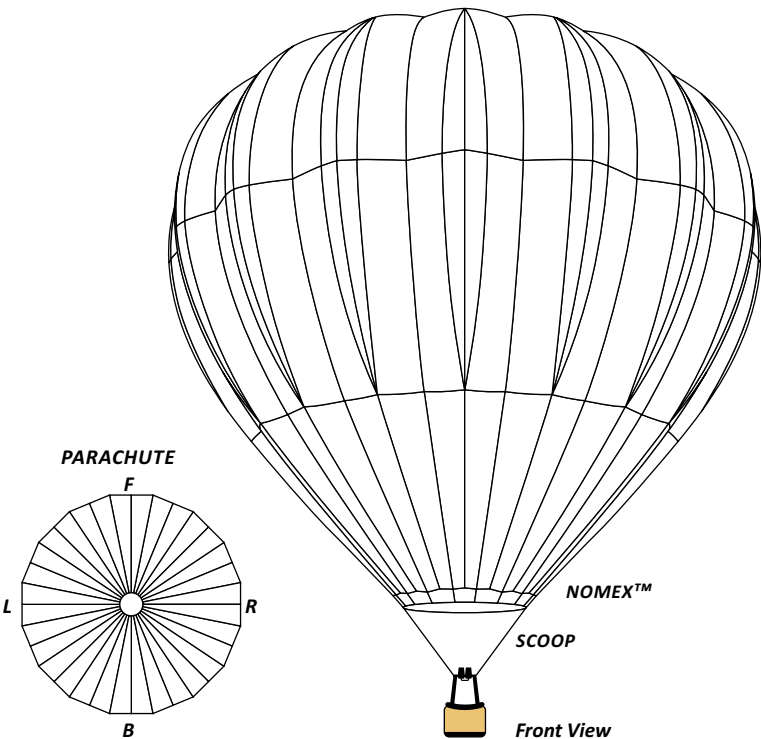

Due to the differences in computer monitors, color pencils, markers, and other media PLEASE mark the colors used in your design.

STANDARD FABRIC COLORS

RED	LIME	AZURE	GRAPE	BROWN	SILVER
ORANGE	KOOL GREEN	MID BLUE	PURPLE	WHITE	GOLD
WARM SAND	HOLLYBUSH	ROYAL	BURGUNDY	GRAY	
YELLOW	TURQUOISE	NAVY	PINK	BLACK	

*Silver & Gold are Metallic Fabrics

STANDARD NOMEX™ COLORS

RED	GREEN	BLACK
ORANGE	ROYAL	
YELLOW	NAVY	

DISCLAIMER: Alterations to the above design may need to be made by the Cameron Design team in order to meet production standards